

# HUDGPS Quick Hardware Installation

Rev.A03

## 1.1 Package Contents



- A) User Manual CD
- B) Hardware Quick Installation Guide
- C) Two pieces of Reflection layer film
- D) Double side sticker
- E) Iron Plate
- F) HG-100 body
- G) DC 5V Car Charger



## 1.2 Quick Hardware Installation

### A. Paste the reflection layer film on windshield

NOTE:


Please be careful to complete the reflection layer film's pasting in the first time. Re-pasting of this reflection film will degrade the efficiency of sticking.

- Please find the most suitable position of the reflection layer film on the windshield window to get the best projecting angle. For example for left driving, it is recommended to put the reflection layer film on the left under corner of the windshield window.



- Remove the backside film of the reflection layer film (item C) and apply carefully into the chosen position on last step. Gently smoothing this film onto windshield to eliminate and avoid bubbling generated.

(Note : Regular process will be recommended to apply one slight thin film of soap mixed water on the side which to stick onto windshield)




- After pasting the reflection layer film (item C) on the windshield window, adjust the position to the suitable place.



- Use the smooth slab to remove the bubbles which stay between reflection layer film and windshield glass. Be careful not to drag reflection layer film out of chosen position far away.




- Wipe off the surplus soap water around reflection layer film.

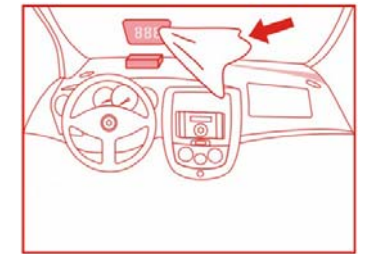

### B. Fix the HG-100

- Remove the backside paste of the double side sticker (item D) and stick it onto the iron plate (item E) as shown below.

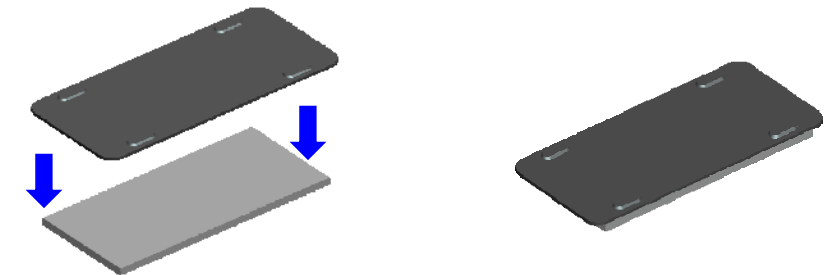

- Place the iron plate on the dashboard and directly underneath the reflection layer film. Check from driver seat if the image of the iron plate is projected well into the area of the reflection layer film. Mark this dashboard position as your reference position.
- Let HG-100 (item F) magnetize with the iron plate and check the projecting area is right in the reflection layer film (item C) and please make sure to get the most comfortable view angle.
- Remove the other backside film of the double-side sticker (item D) and paste on dashboard (which is decided in step 2).

### C. Starting the HG-100

- Starting your car and plug in the car charger to the HG-100.
- Press the power button of the HG-100 last 2 seconds.
- Put the HG-100 on the iron plate and it will be magnetically fixed on the plate.
- HG-100 will show "GPS" before got position fixed.
- In the open sky, the HG-100 will get TTFF fixed within 1 minute.
- After GPS position fixed, the HG-100 will project the heading and speed of drive information.

**GlobalTop Technology Inc.**

16 Nan-ke 9<sup>th</sup> Rd Science-based Industrial Park, Tainan 741, Taiwan, R.O.C.  
Tel:+886-6-6007799 Fax:+886-6-5053381 <http://www.gtop.info> email:sales@gtop-tech.com  
© Copyright 2006 GlobalTop Inc.

# HUDGPS Quick Hardware Installation

## 1.3 Speed Unit switch between km/h, mile/h


Press Function Touch button to switch km/h and mile/h.



Function Touch button

### Speed Unit indicate

1 sec button pressed  
HUD will show the setting of speed unit.

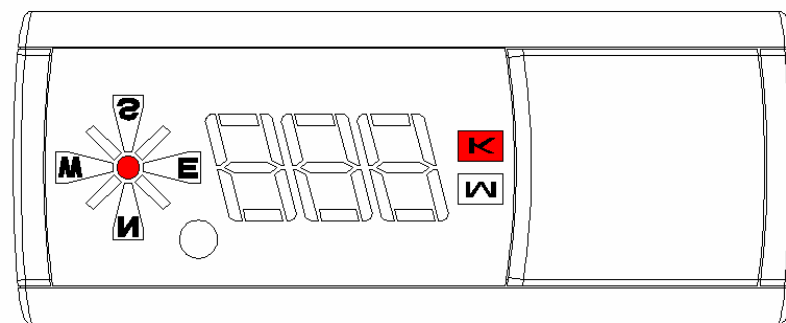

### Speed Unit Switch

0.5 sec button pressed  
HUD will change km/h and mile/h every time.  
Release button 3 seconds  
HUD will keep the speed unit you choose.

## 1.4 Speed Warning Function

Press Function Touch button to set the speed warning.




Function Touch button

### Speed Warning indicate

2 sec button pressed  
HUD will show the setting of speed warning.

### Speed Warning Switch

0.5 sec button pressed  
HUD will change the setting of speed warning as a loop.

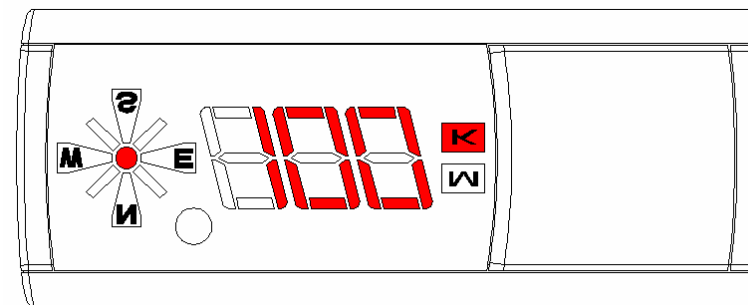

### Speed Warning Set

2 sec button pressed  
HG-100 will keep the setting of Speed Warning.

## 1.5 HG-100 Button Function Setup



Function Touch

Power Button

	<b>Power ON/OFF and Screen ON/OFF</b>	
<b>Power Button</b>	Press 2 seconds	Power ON and OFF
	Press 1 second	When power on, HG-100 will switch on and off the screen
<b>Function Touch</b>	<b>Speed Unit Mode</b>	
	Press 1 second	HG-100 will into the speed unit mode.
	Press 0.5 second	When in the speed unit mode, HG-100 will change the speed unit indicator.
	<b>Speed Warning Setting Mode</b>	
	Press 2 seconds	HG-100 will into the speed warning setting mode.
	Press 0.5 second	When in the speed warning mode, HG-100 will change the speed warning setting.
Press 2 seconds	When in the speed warning mode, HG-100 will keep the setting and leave the speed warning mode.	